



## 760us Servo Adapter Instrument

### Brief:

ASSAN 760us servo adapter can convert the conventional 1520us wide-pulse servo signal into the new-type 760us narrow-pulse signal to drive the 760us high-speed servo. It will give the helicopter control faster response and better performance. It will greatly improve the performance and applicable scope of the common gyros such as GY401 and give the conventional gyros a new life.

In addition, this adapter is also applicable to the new 760us high-speed servo to be directly used in other surface control and get the extra-high-speed control surface response performance. It will greatly extend the applicable scope of the new-type 760us high-speed servo.


### Popular 760us servos:

- ◆ Futaba BLS251
- ◆ Futaba S9251
- ◆ Futaba S9256
- ◆ LogicTech 6100G
- ◆ MKS DS8910

### Features:

- ◆ Input pulse: : 1520us
- ◆ Input frame rate : any type
- ◆ Output pulse : 760us
- ◆ Out frame rate : 333Hz
- ◆ Size : 20 X 20 X 9.5mm
- ◆ Weight : 4g

### Diagram of connection:

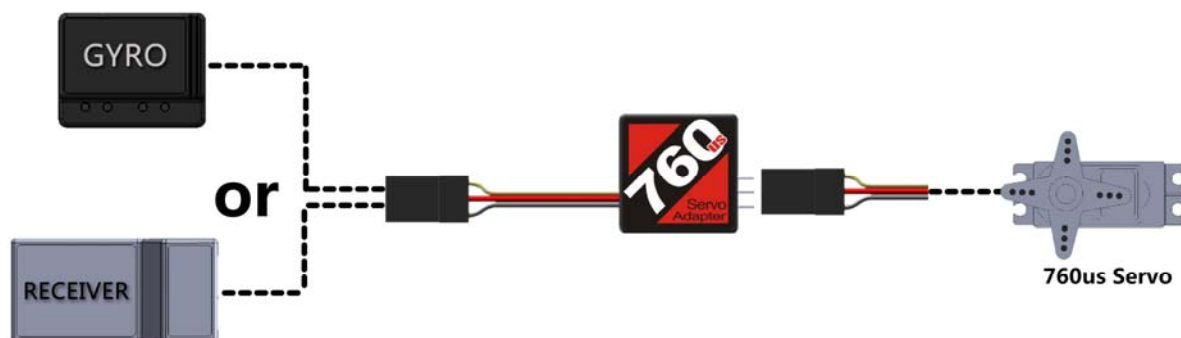

### To use:

1. Connect the adapter between the 760us servo and gyro (or receiver) as indicated in the diagram above.
2. The LED will blink if there is no correct signal input; while the LED will be long on if the signal input is normal.